

Towards a Roadmap for Future Home Networking Systems: An Analytical Hierarchy Process Approach

Georgia Dede, Thomas Kamalakis, *Member, IEEE*, and Dimitris Varoutas, *Member, IEEE*

Abstract—Home Networking Systems (HNS) play a crucial role in achieving broadband service delivery to end users and are quickly becoming the next arena for telecom operators and companies. This emphasizes the need for a technology roadmap in order to address several key issues associated with the deployment of these systems. The present paper presents the results of the European project ICT-OMEGA road mapping effort for future HNS focusing on the most indicative and critical function, namely that of network extension. Taking into account the various social, economic and technological factors, three alternative technologies, namely the 802.11n, 60GHz and Power Line Communications (PLC) have been ranked, using the Analytic Hierarchy Process (AHP). Based on a number of expert surveys, the technology value of each solution is calculated. The results indicate that PLC possesses the largest potential for delivering broadband services in the home environment but also underlines the need for hybrid solutions. The results also reveal various crucial aspects of HNS deployment which are related to current research and standardization activities. A sensitivity analysis is also performed to ascertain the reliability of the results.

Index Terms— Decision making, Home networking systems, Analytic Hierarchy Process, IEEE802.11n, PLC, Radio 60GHz, Technology roadmap.

I. INTRODUCTION

Home Networking Systems (HNS) will play a crucial role in achieving end-to-end broadband service provision, enabling the penetration of the future internet. Traditionally, in-building networks, for instance in corporate or academic settings, have a tenfold higher capacity than their access points to the rest of the telecommunication infrastructure. Since Fiber-To-The-Home (FTTH) promises symmetric access data rates of at least 100 Mbit/s per household [1], HNS should support gigabit per second data transmission, limiting the latency time below 10msec. Inside new buildings,

optical fiber-based systems (either glass or plastic) may provide the ultimate solution in terms of bandwidth and range. However, installing fiber cables inside older office buildings or dwellings is usually not preferred, since it is accompanied with increased cost and user discomfort.

The ICT-OMEGA project aims to develop user-friendly HNS, capable of delivering high-bandwidth services and content, at a transmission speed of at least one gigabit per second [2]. The project aims to incorporate three different “no new wires” technologies, namely the optical wireless [3], radio [4]-[6] and Power Line Communications (PLC) [7] into a single inter Medium Access Control (inter-MAC) layer. The OMEGA inter-MAC is a technology independent layer, located between layer 2 and 3, providing common functionalities over heterogeneous communication systems. The inter-MAC is in charge to setup a resilient, reliable and easy to use gigabit home network that guarantees the quality and the continuity of services within the home environment [2]. The network consists of various interconnection points called extenders that spread inside the home, supporting the hybridization of the three aforementioned technologies. As shown in Figure 1, network extension is a fundamental aspect of the OMEGA HNS [8]. It aims to extend the HNS coverage and allow the communication between devices having different Physical Layer (PHY) interfaces. Network extension can be realized at a wireless hotspot on the ceiling of the room or even at the terminal devices themselves. Conceivably, every network device may extend the network acting as a “multi-hopper”, in the sense that it is able to process (receive and forward) traffic for which it is not an end point. The extender device may act as a router by forwarding data for other network nodes and can also generate and receive packets of its own supporting ad-hoc network functionalities.

Manuscript received October 8, 2010.

G. Dede is with the Department of Informatics and Telecommunications, University of Athens, Panepistimiopolis, Ilisia, Athens, Greece GR157841 tel.+302107275318; fax: +302107275601; (e-mail: gdede@di.uoa.gr). She is also with the Department of Informatics and Telematics, Harokopion University of Athens, Harokopou 89, Kallithea, Athens, Greece GR17471.

T. Kamalakis is with the Department of Informatics and Telematics, Harokopion University of Athens (e-mail: thkam@hua.gr).

D. Varoutas is with the Department of Informatics and Telecommunications, University of Athens (e-mail: arkas@di.uoa.gr).

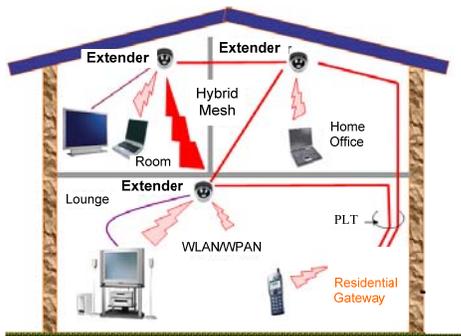


Figure 1. Illustration of hybridization of technologies inside the HN

Each of the “no new wire” technologies considered in ICT-OMEGA may be used to provide the extension functionality. Taking into account that each comes with its own merits and shortcomings, it seems that no single technology will be able to satisfy every user requirement.

This paper seeks to shed light in this problem, contributing to the technological roadmapping of HNS in general. It considers three possible alternative technologies for network extension namely IEEE 802.11n, 60GHz radio and PLC. To rank these alternatives, the Analytic Hierarchy Process (AHP) methodology is used [9] as a fundamental part of an effective technology roadmapping introduced in [10]. The main objective of the paper is to evaluate the prospects of the various home networking technologies both from a technical and a socio-economic point-of-view. The paper builds on previous work [11], where the criteria and factors affecting the HNS deployment were identified and their importance was discussed. Based on these criteria and factors, the AHP framework is applied to its full extend to rank the several technological alternatives. AHP is a tool for complex decision making which reduces the overall process in a set of discrete sub-problems, each of which can be tackled more easily. It has been used around the world on numerous occasions, in sectors such as government [13], business [14], industry [15], healthcare [16], technology [10], [11] education [17] and telecommunications [18]. As a representative example, in [18] the authors propose a model, based in AHP, which can be applied to improve the group decision making in selecting a telecommunication system that satisfies customer specifications. Interestingly enough, in [19] the concept of a System of Systems (SoS) collaborative formation mechanism is discussed using the AHP process.

The application of AHP in the present work reveals the prospects of the three technologies in question in future HNS deployment. To best of author’s knowledge, this is a subject not previously addressed in the literature. According to the findings of the present work, PLC seems to take some precedence over the other two technologies but emphasis must also be placed in hybrid solutions incorporating multiple technologies. Several issues concerning the device performance and component cost are revealed and the relevance of current research and standardization activities is discussed. In order to validate the reliability of the results, the authors extend the AHP technology value framework

introduced in [10] incorporating sensitivity analysis and Monte Carlo simulation. This serves as a means to investigate how uncertainty influences the final ranking. The rest of the paper is organized in the following sections: In Section II, the motivation behind the roadmapping effort for the technologies of choice is analyzed. In Section III, the basic notions of the AHP method are presented. Moreover, the expert surveys conducted within the AHP framework are described in Section IV. Section V illustrates the results obtained by the AHP methodology concerning the extension functionality and HNS in general. The results of the sensitivity analysis are presented in Section VI. Some concluding remarks are given in section VII.

II. MOTIVATION FOR AN HNS ROADMAP

As mentioned in Section I, there are various technology solutions that could be considered for network extension, each with their own particular characteristics. Radio systems, such as WiFi, are already commercially available and 802.11n promises up to 600Mb/s data rates using multiple-input multiple output (MIMO) techniques [4], but the actual network throughput should be lower. Systems operating at the unlicensed 60GHz band [5] and short range Ultra Wide Band (UWB) [6] systems can provide higher data rates. Wireless gigabit-per-second transmission is feasible at 60GHz, but such systems have not reached full technological maturity. State-of-the-art PLC [7] provide hundreds of megabit-per-second wireline connectivity using the already installed power cables of the house. Extending them in the gigabit regime is however a challenge because of the particularities of the power line channel. Optical Wireless Systems (OWS) [1] may also provide high data rates, possibly reaching 10Gb/s in the future, in either the infrared or visible spectrum region. However, there are still important technical limitations in their application. In Line-of-Sight (LOS) OWS configurations, blocking is a serious issue. In diffuse configurations, where there is no need for LOS path, one obtains a poorer signal to noise ratio.

The above discussion illustrates that, as envisioned in OMEGA, future HNS will probably consist of hybrid systems and technology roadmapping is key in ensuring their smooth deployment. This paper aims to contribute towards this end, by ranking three possible alternative technologies for network extension, namely IEEE 802.11n, Radio 60GHz and PLC. Optical wireless systems are not considered in this work, since the majority of the experts believed that this technology is still relatively quite immature. For example, it remains unclear which optical wireless configuration will prevail from a number of possible choices [20], including Visible Light Communications (VLC) and infrared (IR) systems which can be LOS, diffuse or both. Such issues prevent reliable forecasting of several performance-related measures. Furthermore UWB was not considered in the HNS roadmap since they can provide high bandwidth short range links at

small distances, but at distances longer than 10m the throughput is comparable to that of 802.11g [21].

In addition to technical complexities, the network designer must take into account many economic and social issues affecting the acceptance of HNS from the wider public. For example, the system cost becomes of paramount importance as we move closer to the user premises. It is easy to understand that the prospects of HNS are influenced by a blend of performance, cost, health and security related features. In view of such complexities, the need for an HNS roadmap, addressing all these issues, becomes evident in order to reach a consensus about the set of needs and the technologies that are required to satisfy those needs.

III. METHODOLOGY DESCRIPTION

A. AHP framework

The AHP framework incorporating the technology value evaluation [12] is depicted in Figure 2. On the first level, the objective of the decision making process is defined and the alternative courses of action (in our case the alternative technological solutions) are identified. The second level, shown in Figure 2, comprises of the definition of the criteria C_k where k is an integer with $1 \leq k \leq N$, affecting the decision making process. A criterion is a particular aspect that needs to be taken into account when deciding in favour or against an alternative. In the third level, a number of factors F_{jk} are identified for each criterion C_k where j is an integer with $1 \leq j \leq J_k$. A factor is an indicative attribute that characterizes a criterion. The factors can be either quantified in terms of numerical values (for example in the case of the achieved bit rate, in Mb/s) or using a qualitative scale (for example a 6-point scale: Excellent - E, very good - VG, good - G, average - A, poor - P, unacceptable - U).

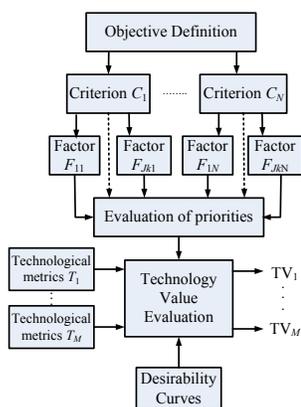


Figure 2. The AHP hierarchical model incorporating the evaluation of the technology values for each technology.

The priorities of the alternatives are evaluated by determining the weights of the criteria and their corresponding factors based on the opinion of experts. To estimate the weights of the criteria, pairwise comparisons [11], [18] are used, according to which, the experts are required to perform a series of comparisons of the various criteria involved in

combinations of two. After the experts have completed these comparisons, one can calculate the average weights w_k of the various criteria involved and obtain their ranking, using several mathematical methods such as the eigenvalue method [21]. The same procedure is carried out for the factors of each criterion and the weights of the factors f_{jk} are estimated. This is an important step in the AHP decision making framework, since it allows for the ranking of the various alternatives.

B. Technology Value estimation

Figure 2 already suggests that the technology evaluation is based on the values of the technological metrics t_{nj} which represents the actual value of factor F_{jk} for the n^{th} technology. The present and future values of the technological metrics are determined by the experts through a series of surveys. For future values of t_{nj} experts need to make a forecast based on their experience. For each value of t_{nj} we can assign a desirability value by specifying a desirability function V_{jk} . This function maps the values of t_{nj} to real numbers between 0 and 100 and is also determined by collecting the opinion of the experts. More specifically, the interval of value range of the factors is divided into a number of sub-intervals and experts are requested to provide a desirability value from 0 (the worst desirability value) to 100 (the best desirability value) for the midpoints of each sub-interval. The desirability function is calculated by averaging the values provided by the experts. The function values at all other points may be determined using linear interpolation. Once V_{jk} and t_{nj} are calculated then $V_{jk}(t_{nj})$ determines the desirability level of the factor F_{jk} for the n^{th} technology. However, in determining the overall desirability of the technologies one must also take into account the relative importance of each factor in the decision making process. The weights f_{jk} determine the importance of factor F_{jk} related to the rest of the factors of criterion C_k . Since the weight of C_k is w_k , one deduces that the weight of factor F_{jk} with respect to all other factors is $w_k f_{jk}$. Therefore in estimating the overall desirability of each technology (i.e. its technology value) one should calculate the weighted sum of $V_{jk}(t_{nj})$ with respect to $w_k f_{jk}$,

$$TV_n = \sum_{k=1}^N \sum_{j=1}^{J_k} w_k f_{jk} V_{jk}(t_{nj}) \quad (1)$$

In (1), TV_n is the Technology Value (TV) of the n^{th} technology and ranges between 0 and 100, quantifying the appropriateness of a technological solution over time. It is interesting to note that, according to the technology value for the n^{th} technological alternative can be thought of as the sum of the technological values of the factors $TV_{nj} = w_k f_{jk} V_{jk}(t_{nj})$ for the alternative in question. One can also define the technological value of criterion C_k for the n^{th} technological alternative by summing up the technological values of its factors,

$$TV_{nk} = \sum_{j=1}^{J_k} TV_{nj} \quad (2)$$

IV. SURVEYS DESIGN AND PARTICIPANTS

A. Definition and Weights of Criteria and Factors

Table I summarizes the factors and criteria pertinent for the extension functionality, including their description. A detailed discussion on how the criteria and factors were identified and the calculation of their weights can be found in [12]. Hereafter, the basic conclusions are summarized and can be drawn from Table I. Twenty five experts in HNS have participated in the pairwise comparisons that was conducted during a period of 3 months in September 2009-November 2009. According to the opinion of the experts, all criteria, except from design issues, have more or less the same weight (ranging between 19% to 24%), suggesting that all corresponding issues have equal bearing. Design issues are deemed of secondary importance probably because there are still many important technological matters to be resolved in order to provide reliable and cost-effective network extension functionality. The situation is quite different when one considers the factor weights. Regarding the system trustworthiness/confidence criterion, it is clear that health issues are the most important aspect to consider reflecting the growing public concern on this subject [24]-[25]. Several standards [26] are addressing the health concerns such as the IEEE C95.1-2005 [25].

TABLE I
CRITERIA AND FACTORS FOR THE EXTENSION FUNCTIONALITY

Criteria-Factors	Description	Weight
<i>C</i> ₁ : System Performance (<i>w</i> ₁ =20.38%)		
<i>F</i> ₁₁	Range For wireless this is the distance that can be covered in a line-of-sight configuration. For PLC this is maximum cable length.	41.37 %
<i>F</i> ₁₂	Upstream Bit Rate The maximum upstream PHY-layer bit rate that a single user terminal can achieve when connected to the extender	23.54 %
<i>F</i> ₁₃	Downstream Bit Rate The maximum downstream PHY-layer bit rate that a single user terminal can achieve when connected to the extender	35.09 %
<i>C</i> ₂ : Simplicity of Use (<i>w</i> ₂ =19.18%)		
<i>F</i> ₂₁	Plug and Play* Once installed, is the system plug and play?	54.52 %
<i>F</i> ₂₂	Compatibility with legacy devices* Is the system compatible with existing networks and home appliances?	45.48 %
<i>C</i> ₃ : Design (<i>w</i> ₃ =13.36%)		
<i>F</i> ₃₁	Design-Integration to home environment* How well do the OMEGA systems incorporating system functionality fit with the overall household decoration?	37.41 %
<i>F</i> ₃₂	Volume of Extender The volume of the extender device in cm ³ .	33.66 %
<i>F</i> ₃₃	Weight of Extender The weight of the extender device in kg.	28.94 %
<i>C</i> ₄ : Economic (<i>w</i> ₄ =22.67%)		
<i>F</i> ₄₁	Cost of Extender The cost of purchase of the extender device.	39.48 %

* These factors are quantified using a qualitative scale (ex. Excellent, Good, Average, Poor)

<i>F</i> ₄₂	Annual Cost of the most expensive component in the technology	The annual cost in order to repair the most expensive component in the technology in case of damage or failure.	22.44 %
<i>F</i> ₄₃	Annual operation cost	It mostly includes the influence of power consumption on operation cost	38.08 %
<i>C</i> ₅ : System Trustworthiness/Confidence (<i>w</i> ₅ =24.38%)			
<i>F</i> ₅₁	Security/Privacy*	Are security and privacy issues important?	17.64 %
<i>F</i> ₅₂	Health issues*	Are health issues important? (meeting radiation exposure, eye-safety, skin-safety, etc standard)	48.19 %
<i>F</i> ₅₃	Mean Time between failure of extender	Mean Time that intervenes between two consequent failures of the extender device	34.17 %

According to Table I, security seems to be a minor concern. This is possibly a reflection of the fact that the HNS vendor can implement security-related methods on a protocol basis. In light of this, the Wi-fi Protected Access WPA2 [27] security protocol is incorporated in the IEEE802.11n. Regarding power line communications there are two intrinsic levels of security in PLC equipment: a DES (Data Encryption Standard) encryption and the possibility of setting up separate networks on the same electric circuit with two different encryption keys that can be configured using software usually provided with the equipment [28]. Interestingly enough 60GHz signals remain confined within a room offering both security and interference advantages. Concerning the design criterion, experts seem to believe that the design/integration to the home environment tends to be the most important aspect. It is also deduced that both the volume and weight are important issues for both practical and marketing reasons. Regarding the economic criterion, great importance is placed on both the component price and the influence of power consumption on operation cost emphasizing the need for energy efficient (green) devices. Regarding the simplicity of use criterion, the plug and play feature is considered somewhat more important than the compatibility with legacy systems – probably because this feature is already present in Digital Subscriber Line (DSL) modems as well as IEEE802.11 wireless routers. Compatibility with legacy devices is also an important issue to take into account. Future adopters would prefer the systems incorporating extension functionalities to be easily mounted on their laptops and other appliances much like WiFi cards on USB sticks. As far as performance is concerned, the experts seem more concerned about the range rather than the maximum achievable bit rate of the system. It should be noted that as far as 802.11n is concerned, range refers to a LOS configuration, since non-LOS is rather difficult to evaluate since one must take into account the actual room/house characteristics. Downstream bit rate is also important in view of many popular services where bandwidth requirements are asymmetric. The importance of upstream data rate is not trivial however (about 24%) probably because of several

emerging symmetric service technologies, such as on-line gaming, distributed and peer-to-peer applications [29] etc.

B. Surveys for Technology Value evaluation

Four additional surveys were carried out in order to evaluate the technological metrics and the desirability functions, required for the estimation of the technology values for the various alternative technologies. The surveys are briefly described in Table II.

TABLE II
SURVEY DESCRIPTION

#	Description	Duration (mm/yy)	No of Experts
1	Technology metrics for IEEE 802.11n	02/10-03/10	11
2	Technology metrics for 60GHz	02/10-03/10	12
3	Technology metrics for PLC	02/10-03/10	10
4	Desirability functions	02/10-03/10	31

The survey design was extensively discussed among the several OMEGA partners. The feedback from the telecom operators was interesting enough and very useful for the final survey design taking into account the user perspective in both the performance-related issues and the socio economic aspects. The experts are highly trained employees with many years experience from the various organizations inside the OMEGA project consortium [30], which constitutes a well balanced blend between industry and academia from many parts of Europe (France, Italy, Germany, Spain, Austria, Slovenia, UK and Greece). Their expertise lies primarily in the field of HNS technologies. The aforementioned surveys were conducted by a web-based survey/roadmapping platform incorporating the AHP framework, where experts log on to the platform and fill out the questionnaires. The web-platform has been developed and maintained by the University of Athens.

V. RESULTS AND DISCUSSION

In this section, the results of the surveys in Table II are discussed and the Technology Value of each alternative for the interval 2011-2015 are calculated and discussed.

A. Technological Metric Forecasting

Figure 3 illustrates some examples of the technological metrics calculated from the averaging of data provided by the first three surveys of Table II. Regarding the downstream data rate in Figure 3(a), the experts think that 60GHz systems will most likely take precedence over the other technologies. This is because of the license-free spectrum between 57 and 64 GHz which is available for data transmission in this band [31]. It should be noted that 60GHz systems can be realized using Complementary Metal Oxide Semiconductor (CMOS) circuits [31]. Such advances, together with some other promising features of the 60 GHz band have led the standardization activities. IEEE has formed 802.15.3.c study group to develop a millimeter-wave-based alternative PHY for wireless

personal area network (WPAN) [32]. Despite the bandwidth abundance in the 60GHz band, on the average the experts predict that commercial systems will provide slightly less than 1Gb/s by 2015, probably because of technology-related performance issues.

PLC systems come second, with predicted data rates of the order of several hundred megabit per second. Restrictions in these systems originate mainly because of the characteristics of power line channels. Advanced modulation schemes such as Orthogonal Frequency Division Multiplexing (OFDM) can be used to push the system capacity to its limits [33], [34], [35]. Many organizations have developed specifications for PLC, including the HomePlug Powerline Alliance, and Universal Powerline Association. The ITU-T adopted Recommendation G.hn/G.9960 as a standard for high-speed powerline, coax and phoneline communications. IEEE P1901 is an IEEE working group developing the global standard for high speed powerline communications.

IEEE 802.11n comes third in terms of downstream capacity, achieving its maximum data rate (600Mb/s) near the end of the study period. 802.11n incorporates both MIMO and OFDM as a means to increase the available data rate. It is interesting to note that actual throughput performance for wireless radio system may be less because of MAC-related issues. Within 802.11n several MAC enhancements are being considered in order to alleviate this problem [36]. Similar conclusions can be drawn from the upstream bit rate forecasts.

The results regarding the range of the three technologies are shown in Figure 3(b). As expected 60GHz systems have significant lower range because of the properties of electromagnetic radiation in this part of the spectrum, than the PLC and the 802.11n solutions. Hence, range seems to be a limitation for the 60GHz technology. At lower frequencies, say in UWB systems, coverage may vary significantly with frequency and there are 5 band groups covering a frequency range from 3.1 GHz to 10.6GHz corresponding to a coverage range between 10m and 1.56m, respectively [37]. Because of relatively smaller changes in frequency, coverage range does not change dynamically for the 60-GHz radio. The 60GHz channel generally exhibits optical-like properties since the strongest components tend to be Line of Sight (LOS). At this band there is a large free space propagation loss (about 20 dB more than that in 5 GHz band) which could be overcome by the use of high gain directional antennas in order to improve the signal coverage [38], which are feasible to implement due to the relatively short wavelengths ($\approx 5\text{mm}$). The short wavelengths in this band impose some serious challenges such as greater signal diffusion and difficulty diffracting around obstacles. The transmission of 60GHz signals is strongly influenced by surrounding obstacles and walls, as well as shadowing [39]. People moving inside the line of sight may attenuate the signal by as much as 15dB and objects such as furniture, walls, doors and floors found in indoor environments can also be problematic. Because of their optical-like nature, 60GHz signals cannot penetrate room walls rendering each room into a separate cell where the

whole system capacity is possible [40]. This of course necessitates the use of one hotspot per room. These facts are reflected in Figure 3(b), where the experts seem to believe that the range of the 60GHz would reach some tens of meters through the study period.

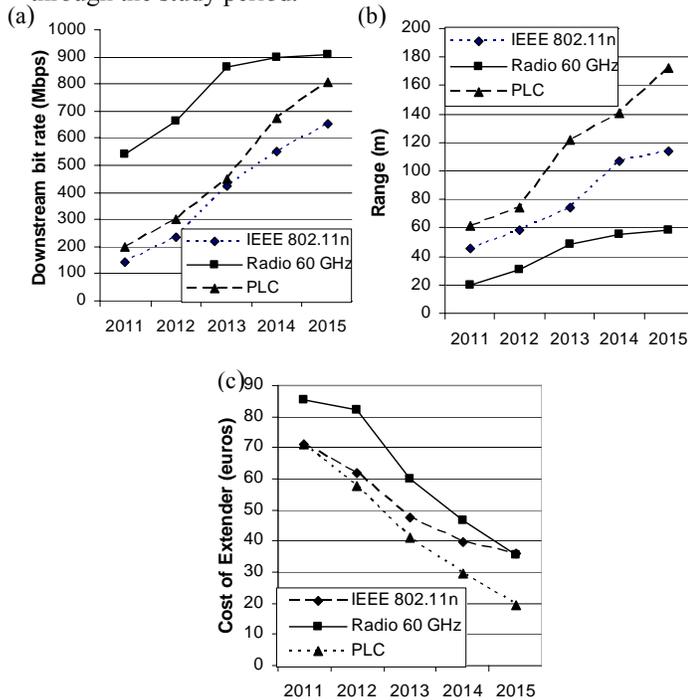


Figure 3. Forecasts for various technological metrics.

Link characteristics are very different in the case of IEEE 802.11n, where the penetration loss is much less and rich multipath propagation exists to provide diversity. As a result, the range can reach up to hundreds of meters, which coincides with the experts point of view depicted in Figure 3(b). 802.11n extends the original concepts of 802.11 and includes many new options to improve the quality of the wireless link and thereby to increase both data rate and range. The coding scheme for 802.11n is better than earlier versions of the standard and this results in more data bits being transmitted in the same size channel [36]. In addition, 802.11n allows channel bonding that will essentially double the data rate. Contrary to other wireless local area networking standards, 802.11n maintains high-speed connections at greater than 90m. In 802.11 networks, a single wireless router can be used to achieve connectivity over multiple rooms. Nevertheless, the coverage range in the IEEE 802.11n will vary depending on the environment as well as on the capability of the user and access point.

As shown in Figure 3(b), PLC technology takes precedence compared to the other technology alternatives. According to Table I, in the case of PLC, the range is related to the meters of the wires used for the signal transmission within the house. It is deduced that the maximum cable length will reach around 170 meters in 2015. In fact, the range of the PLC wires is independent from the limits mentioned for IEEE 802.11n and 60 GHz. The only limiting factors concerning the power lines

communication originate from noise, attenuation and multipath propagation [33].

The last example of technological metric forecasting is the cost shown in Figure 3(c). The experts predict that the cost will be higher for the 60GHz solution, especially in earlier years. Today's 60-GHz technology depends on relatively expensive and GaAs semiconductors, but as discussed previously, various works indicate that silicon chips can do the job with much less power and at a fraction of the cost. Cost reduction in all three technologies depends on production volume and therefore the demand for future home networking equipment. If users are attracted by broadband services such as HDTV, online gaming, high-definition content sharing and distribution between end-user devices such as the storage device and user terminals, then the increase in production volumes will promote further cost reduction [41]. Towards this end, standardization is also another important element that may reduce the cost of the network components.

B. Desirability Function Curves

Figure 4 illustrates some examples of desirability function curves V_{kj} for the cases of a) downstream bit rate and b) cost for the extender systems. Experts are strict when concerned with downstream rather than upstream traffic. For example a 100Mb/s downstream data rates maps to 70% satisfaction level, while for upstream data rate this is much higher. This reflects the asymmetric nature of many broadband services and particularly HDTV where high downstream data rates are important for high quality service provision.

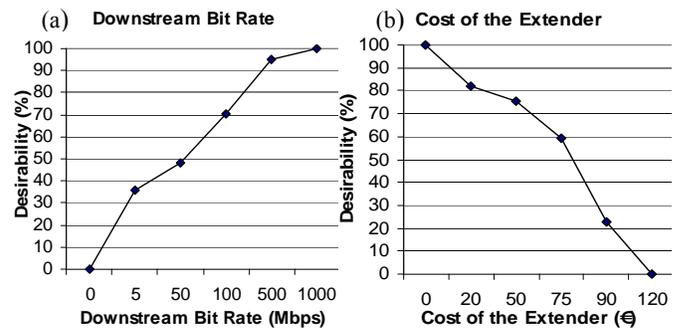


Figure 4. Examples of desirability function curves

The desirability curve for the cost is also interesting emphasizing the need for low cost solutions. Much like access networks, the commercial prospects of home networks are much more sensitive to component cost than say, core networks, since the equipment is now installed at the user premises and not some remote central office owned by the telecom operator. According to the experts, the systems must be priced below 100€ in order to be attractive from a user point-of-view.

C. Estimation of the Technology Value

The technology value of each alternative solution was evaluated through (1) in each time period, once the desirability functions V_{jk} and the technological values t_{nj} are

determined by the appropriate expert surveys described in Table II. As mentioned in Section III, the technology value for the n^{th} technological alternative can be thought of as the sum of the technological values of the factors TV_{ijk} . Figure 5 shows the technology values calculated for each of the alternative networking technologies considered. The results are also indicative for other network devices as well (terminals, etc). The results of Figure 5 will be further elaborated in Section V.D considering the technological values of the factors and criteria, which determine the final ranking of the alternatives

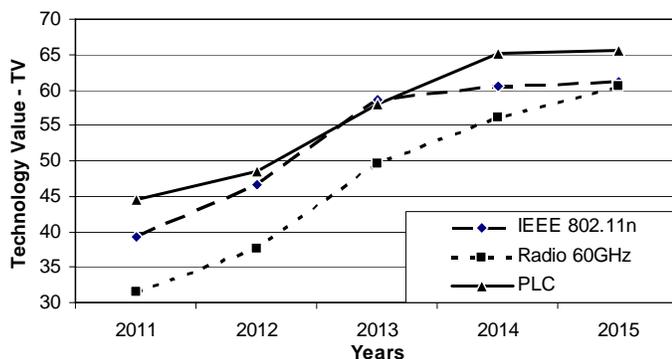


Figure 5. TV for the technology alternatives for network extension

Figure 5 suggests that the technology value of each technology is improved over time as a consequence of the increased performance and cost reduction. The graph indicates that PLC seems to have the highest short-term potential. For both PLC and 802.11n systems, the TV eventually level off after 2014, suggesting that these technologies will reach maturity within the next two to three years. The situation is different for the 60GHz systems for which the TV is increasing even beyond 2014. Interestingly enough, 60GHz systems seem to achieve the same TV as 802.11n in 2015 suggesting that in the long run, they may serve as the technology of choice for wireless home access. It is also interesting to consider the fact that PLC and 802.11n have pretty much the same TV in 2013.

Hybrid radio/PLC systems, combining the merits of both technologies could also provide an alternative. Products combining both technologies at the PHY have already been commercialized. Within ICT/OMEGA, all three technologies are combined in a single inter-MAC layer. The issue of hybridization is more interesting when the PLC and the 60GHz systems are combined together: 60GHz can provide high bandwidth wireless connection within the room while PLC can be used to extend the connectivity across multiple rooms of the house. In order for PLC to provide the future home network backbone however, its capacity must be extended in the Gigabit per second regime. On a more general sense, the capacity of the home network backbone is an important issue for future HN deployment. In the long run, fiber either multimode or plastic would provide the best solution, potentially offering one order of magnitude higher capacity than PLC at the expense of installing additional wires

inside the house. Towards this concept, radio-over-fiber (RoF) techniques may provide an interesting potential [35]. The RoF concept relies on modulating an optical source at by the radio signal (instead of its baseband form) and distributing it through optical fiber to the various hotspots. In this manner, the hotspot/base station equipment is much simpler, since no frequency up/down conversion is required at the various base stations. At 60GHz however, it is impossible to modulate the LASER using direct modulation and an external modulator should be used, increasing the cost. In any case, a RoF-based backbone network solution using high frequency radio signals presents with several technical challenges and will not be easily made commercially available in the near future. Figure 5 suggests that shorter term network extension would be provided by PLC. Optical wireless technologies combined with either fiber or PLC could also provide a longer term alternative for distributing data at gigabit bit rates inside the house. The combination of visible light communication (VLC) and PLC has already been proposed [42]. In this approach, white LED of ceiling lamps used for illumination, are also modulated in order to provide wireless data range. The various white LED lamps can be connected using a PLC network, providing both power supply and backbone connection. Such systems can be used for data broadcast, but do not provide upstream connectivity (i.e. from the terminal to the hotspot).

D. Technological Value of each factor and criterion

Figure 5 illustrates the total Technology Value of each alternative, but it is also interesting to consider its various components, i.e. the TV of each criterion and each factor as defined in Section II.B. It seems to be that PLC receives the highest technology values in the most cases. Figure 6 (a) and (b) depict the technological values of criteria in 2011 and 2015 respectively. Figure 6 suggests that PLC rates better both in the beginning and the end of the study period in terms of system trustworthiness and the economic criterion defined in Table I. Simplicity and integration to home environment are generally favourable for PLC in 2011, but eventually level off for all three technologies in 2015. 802.11 also rates high in terms of home environment integration in 2011. 60GHz systems rate high in terms of performance but do not meet well with other criteria, especially in 2011, which justifies the precedence of the other alternatives TVs over the 60GHz solution.

Figure 7 indicates the technological values of the factors for each technology averaged throughout the study period. The figure also contains useful information, breaking down the contribution of each factor in the total technology value of a solution. Interestingly enough, all three technologies accumulate more technological value because of downstream bit rate performance than in terms of upstream data rate and range. Downstream data rate is in fact the most important asset for 60GHz systems. Plug-and-play carries high importance for 802.11 and PLC, probably because these technologies are already commercially available. The device cost is also an important asset for 802.11 and PLC. Health

issues constitute an important component in the technological value of PLC, especially in light of the public concern on the impact of radio radiation in wireless technologies.

Comparing the technological values of the various factors, one deduces that up to a point, the technologies are complimentary. Taking into account the previous discussion in this section, as well as the fact that the technology values in Figure 5 of PLC and 802.11n are rather close, especially near 2013, it seems that a hybrid solution incorporating both would present with interesting prospects compared to HNS incorporating only a single technology.

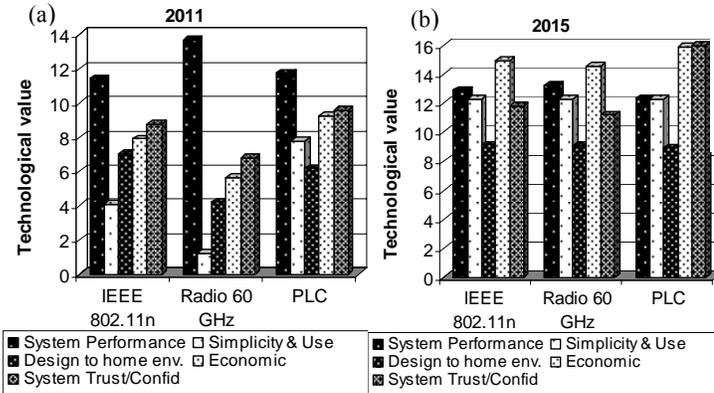


Figure 6. Technological values of Criteria (a) 2011 (b) 2015

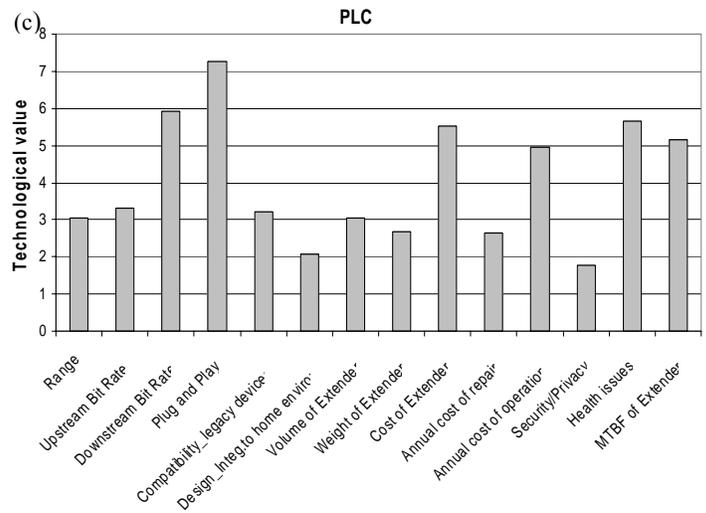
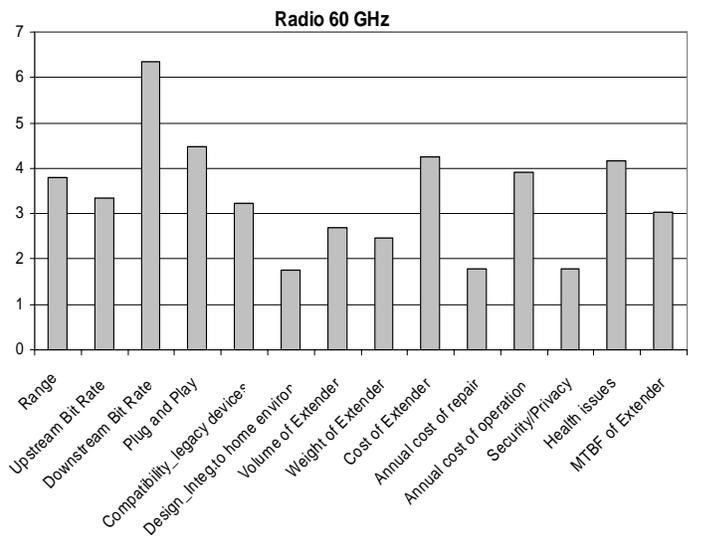
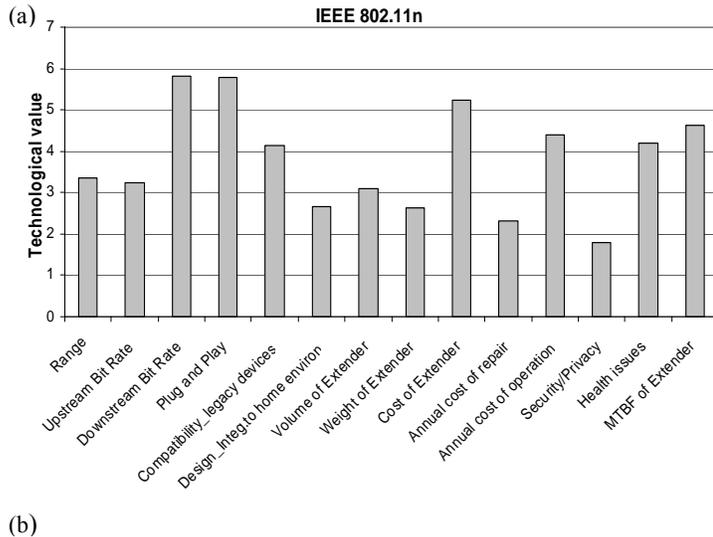


Figure 7. Mean Technological values (a) IEEE 802.11n (b) Radio (c) 60GHz PLC

VI. SENSITIVITY ANALYSIS

The results obtained in the previous section may be undermined by uncertainties involved in the evaluation of priorities or the technological metric forecasts, which according to Figure 2 are essential elements for evaluating the technology values. In this section we discuss the reliability of the results against uncertainty by carrying out a sensitivity analysis. In section V.A., we consider the impact of changing primarily the value of a weight of a single criterion or factor while in section V.B., we use Monte Carlo simulation to estimate the effect of simultaneously introducing random perturbations in these weights. In section V.C. we discuss the changes in technology value when a single technological metric is varied, whereas in section V.D. Monte Carlo simulations are performed to study the effect of changing many of these metrics simultaneously.

A. Changes in primarily a single component

Figure 8 (a) and (b) illustrate the influence of perturbing the weight of the performance criterion in the technology value of the alternatives in 2011 and 2015 respectively. It should be noted that the weights need to be normalized so that $\sum_k w_k = 1$ and consequently changing a single weight will necessarily induce changes in the weights of other criteria as well because of the renormalization. Figure 8(a) suggests that changing w_1 affects the TV of all three technologies. In 2011, the TV of 60GHz systems changes significantly. The changes are less significant in 2015, because as indicated in Figure 6(a) and (b) the technology value of the performance criterion becomes less important towards the end of the study period. It is also interesting to note that the ranking between the various alternatives is preserved both in 2011 and 2015 even for relative changes as high as $\pm 70\%$. Similar conclusions are drawn when the sensitivity analysis is carried out for the weight of trustworthiness/confidence, which is the criterion with the highest weight in Table I. Figure 10 illustrates the effect of changing the weight of the downstream bit rate factor, while Figure 11 considers the sensitivity analysis for the weight of the health issues factor, (the most important factor of the trustworthiness/confidence criterion). In both cases, the factor weights are renormalized so that $\sum_j f_{jk} = 1$. It is interesting to note that the ranking is again preserved both in 2011 and 2015.

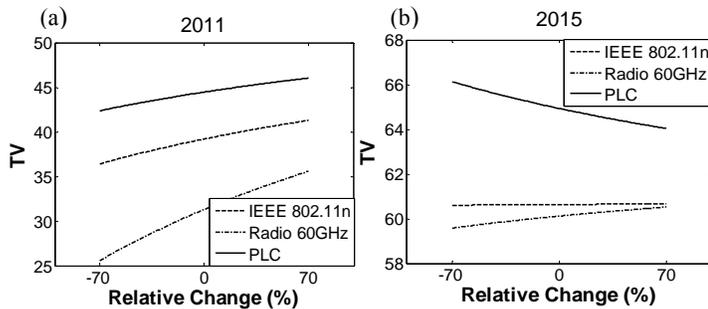


Figure 8. Sensitivity of alternatives for performance changes from -70% to 70% (a) 2011 (b) 2015.

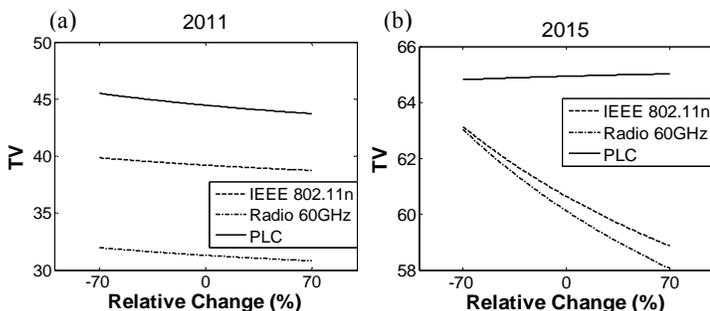


Figure 9. Sensitivity of alternatives for system trustworthiness/confidence changes from -70% to 70% (a) 2011 (b) 2015.

(a) (b)

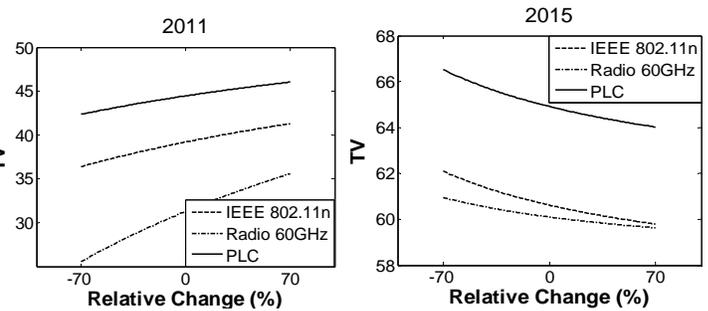


Figure 10. Sensitivity of alternatives for downstream bit rate changes from -70% to 70% (a) 2011 (b) 2015.

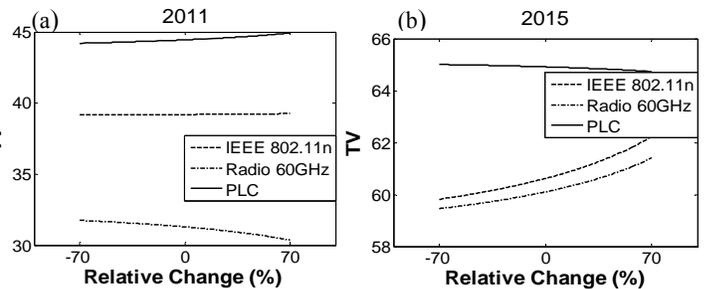


Figure 11. Sensitivity of alternatives for health issues changes from -70% to 70% (a) 2011 (b) 2015.

B. Simultaneous Changes of Criteria/Factors Weights

In order to evaluate the impact of simultaneously changing more than one weight, one can resort to Monte Carlo simulations. We perturb the weights of all criteria and factors from w_k and f_{jk} to $w_k(1+\Delta W_k)$ and $f_{jk}(1+\Delta F_{jk})$ where the perturbations ΔW_k and ΔF_{jk} are assumed zero mean, identically distributed independent random variables. These random variations can be due for example to the fact that the experts may perform inconsistent pair wise comparisons [39]. In Figure 12(a) and (b), we show the histogram of the technology values of 802.11n and PLC in 2015 respectively, obtained when ΔW_k and ΔF_{jk} are randomly chosen from a uniform distribution inside $[-s, s]$ where s is taken equal to 0.1 (corresponding to a maximum $\pm 10\%$ variation with respect to its original value). After the weights are randomly chosen they must be renormalized so that $\sum_k w_k = 1$ and $\sum_j f_{jk} = 1$. The technology values of 802.11n and PLC were calculated using 10^5 Monte Carlo iterations. Interestingly enough, it seems that technology exhibit a similar sensitivity for both technologies and that the TVs in 2015 are somewhat more prone to uncertainty-induced perturbations.

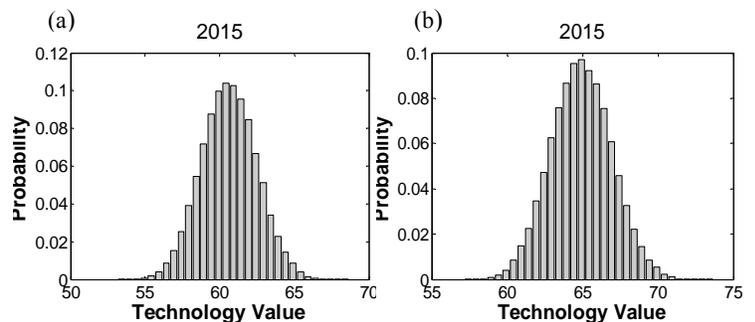


Figure 12. Sensitivity of TV histogram in 2015 for (a) IEEE 802.11n (b) PLC

Monte Carlo simulation can be used to evaluate the probability of rank inversion [43] as well. In our case, we can estimate the probability of rank inversion by measuring the number of iterations in which the technology ranking turns out to be different than that illustrated in Section IV. Figure 13 shows the probability of rank inversion between the two most prominent technologies (PLC and IEEE 802.11n) for 2012 and 2013. The perturbations strength now ranges from 0.1 to 0.5. It is interesting to note that the probability of rank inversion is zero for small perturbations. Interestingly enough, the ranking order is always preserved in 2011, 2014, 2015, where according to Figure 5 the unperturbed TV of PLC and IEEE802.11n differ significantly. In 2012 and 2013 the probability of rank inversion is rather high only for strong perturbations ($s > 0.3$).

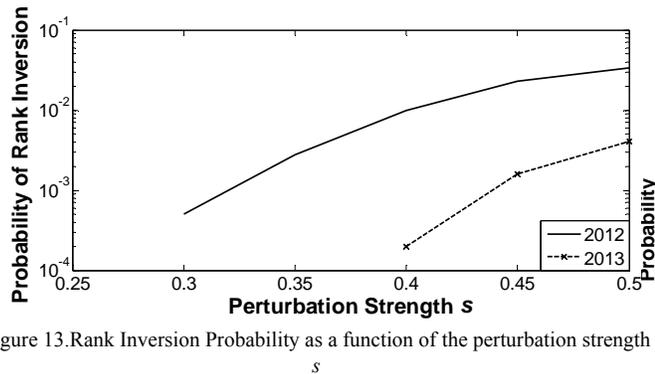


Figure 13. Rank Inversion Probability as a function of the perturbation strength s

C. Changes in primarily a single technological metric

Given that the future values t_{nj} of factors are based on experts forecasting ability according to their experience, a sensitivity analysis is also for t_{nj} . Figure 14 (a) and (b) depict the change in TV brought by varying the technological metrics of downstream bit rate and range factors from their values t_{n31} , t_{n11} , respectively, in 2015. As shown in Figure 14, the variations induce changes in the TV of all three technologies compared to its base value (shown in dash lines). Interestingly enough, Figure 14(a) illustrates that PLC remains the most highly ranked solution unless t_{n31} becomes $\approx 50\%$ smaller for PLC and $\approx 50\%$ larger for 802.11n. Figure 14(b) illustrates that for PLC is always the highly ranked solution even if the range forecasts change dramatically.

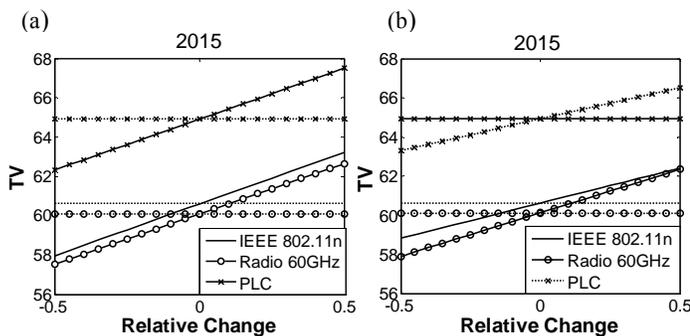


Figure 14. Sensitivity of alternatives for a single technological metric changes from -50% to 50% (a) downstream bit rate (b) range. Dash lines correspond to base values.

D. Simultaneous Changes of Performance Factors Technological Metrics

In this section a sensitivity analysis using Monte Carlo simulation is performed in order to further examine how the forecasting uncertainty influences the TV of the alternatives. The technological metrics of all performance factors are simultaneously perturbed in a fashion similar to II.B. Figure 15 (a), (b) depict the sensitivity of TV histogram the most prominent technology alternatives (IEEE802.11n and PLC respectively) in 2015. The perturbation strength is $s=0.5$ corresponding to a maximum deviation of 25% from the original values. The figure illustrates that forecasting uncertainties do influence the value of TV, but not dramatically. The results of the present section provide an indication of the reliability of the AHP results against uncertainties in the pairwise comparisons and the forecasts carried out by the experts.

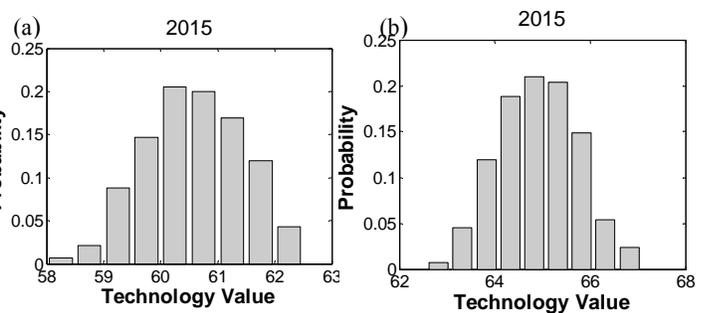


Figure 15. Sensitivity of TV histogram (a) IEEE 802.11n (b) PLC

VII. CONCLUSION

In this paper the home networking system related roadmapping activities carried out within the ICT-OMEGA project have been presented and discussed. Using the AHP the ranking of the various technological alternatives comprising of IEEE802.11, 60GHz systems and PLC has been accomplished. The results focus on network extension but are also indicative for the rest of the home network components as well. AHP indicates that PLC takes some precedence over the wireless alternatives. 802.11 is ranked second best while 60GHz system are regarded as a longer term alternative, which could provide gigabit per second connectivity. The paper also discussed the merits of hybrid integration of these technologies, either in the PHY or a higher network layer. Indeed, PLC would be the most ubiquitous connection in the home, while all the devices would include additional interface to support the benefits of intelligent switching to include a wireless extension. A sensitivity analysis was also performed in order to estimate the uncertainties involved and it was deduced that they do not in general undermine the results of the ranking.

ACKNOWLEDGMENT

The research leading to these results has received funding from the European Community's Seventh Framework Programme FP7/2007-2014 under grant agreement n° 213311

also referred as OMEGA. The authors would like to thank the experts participated in the aforementioned surveys as well as the people working on the Workpackage 1 of ICT-OMEGA. They would like also to appreciate the valuable contribution of Ms. Kelly Papadogeorgaki and Mr. George Kakaletis, both from the University of Athens, Greece to the design, development and maintenance of the survey/roadmapping platform.

REFERENCES

- [1] P.W. Shumate, "Fiber-to-the-Home: 1977-2007," *IEEE Journal of Lightwave Technology*, vol.26, pp.1093-1103, 2008
- [2] J. P. Javaudin, M. Bellec, P. Jaffré, A. Foglar, O. Hoffmann, O. Isson, "Inter-MAC Concept for Gigabit Home Networks", presented at the 2009 PIMRC, Tokyo, Japan.
- [3] D. C O'Brien, "Cooperation in Optical Wireless Communications", *Springer Cooperation in Optical Wireless Communications*, 2007.
- [4] L. Ophir, Y. Bitran, I. Sherman, "Wi-Fi (IEEE 802.11) and Bluetooth coexistence: issues and solutions," presented at the 2004 Personal, Indoor and Mobile Radio Communications, 15th IEEE International Symposium, vol. 2, pp. 847 - 852
- [5] *Technical characteristics of multiple gigabit wireless systems in the 60 GHz range*, ETSI TR 102 555, System Reference Document
- [6] *Short-Range Wireless Communications: Emerging Technologies and Applications*, R. Kraemer, M. Katz, Wiley, 2009.
- [7] K.H. Afkhami, S. Katar, L. Yonge, R. Newman, "An overview of the upcoming HomePlug AV standard", presented at the 2005 International Symposium on Power Line Communications and Its Applications.
- [8] ICT-OMEGA, *OMEGA Architecture Model*, Deliverable 6.1, December 2008. [Online]. Available: <http://www.ict-omega.eu>
- [9] T. L. Saaty, "Decision making with the analytic hierarchy process", *Int. J. Services Sciences*, vol. 1, no. 1, 2008.
- [10] N. Gerdşri, and D. F. Kocaoglu, "Applying the Analytic Hierarchy Process (AHP) to build a strategic framework for technology roadmapping," *Mathematical and Computer Modelling*, vol. 46, pp. 1071-1080, 2007.
- [11] C.W. Chang, C.R. Wu, C.T. Lin, H.C. Chen, "An application of AHP and sensitivity analysis for selecting the best slicing machine," *Computers & Industrial Engineering*, vol. 52, issue 2, pp. 296-307, March 2007.
- [12] G. Dede, D. Varoutas, T. Kamalakis, R. G., Fuentetaja, J.P. Javaudin, "Evaluation of Technological and Socio-Economic Issues Affecting the Deployment of Home Networks: Evidence from the ICT-OMEGA project", *Springer Netnomics: Economic Research and Electronic Networking*, vol.11, pp/ 281-200, 2010.
- [13] Ch.-Ch. Huang, P.-Y. Chub, and Y.-H. Chiang, "A fuzzy AHP application in government-sponsored R&D project selection", *Omega*, vol. 36, pp. 1038-1052, 2008.
- [14] Y. Lee, K. A. Kozar, "Investigating the effect of website quality on e-business success: An analytic hierarchy process (AHP) approach", *Decision Support Systems*, vol. 42, pp. 1383-1401, 2006
- [15] F.T.S. Chan, H.K. Chan, H.C.W. Lau and R.W.L. Ip, "An AHP approach in benchmarking logistics performance of the postal industry," *International Journal of Benchmarking*, vol. 13, pp. 636-66, 2006.
- [16] M. J. Liberatore, R. L. Nydick, "The analytic hierarchy process in medical and health care decision making: A literature review," *European Journal of Operational Research*, vol. 189, pp. 194-207, 2008.
- [17] P. R. Drake, "Using the Analytic Hierarchy Process in Engineering Education," *International Journal of Engineering Education*, vol. 14, pp. 191-196, 1998.
- [18] C.Y.T. Maggie, V.M. Rao Tummala, "An application of the AHP in vendor selection of a telecommunications system," *Elsevier, The International Journal of Management Science*, vol. 29, pp. 171-182, 2001.
- [19] M.J. DiMario, J.T. Boardman, B.J. Sauser, "System of Systems Collaborative Formation," *IEEE Systems Journal*, vol.3, no.3, pp.360-368, Sept. 2009
- [20] O. Bouchet, P. Porcon, P. J.W. Walewski, S. Nerreter, K.-D Langer, L. Fernández, J. Vučić, T. Kamalakis, G. Ntogari, I. Neoskosmidis, E. Gueutier, "Wireless optical network for a home network," *Proceedings of SPIE - The International Society for Optical Engineering*, 7814, art. no. 781406 (2010).
- [21] R. Saeed, S. Khatun, B. M. Ali, and M. K. Abdullhah, "Ultra Wide Band (UWB) Ad-hoc Networks: Review and Trends", *Journal of Computer Science*, vol.1, pp. 35-39, 2005.
- [22] M. Kwiesielewicz and M. Van Uden, "Inconsistent and contradictory judgments in pairwise comparison method in the AHP", *Computers & Operations Research*, vol. 31, pp. 713-719, 2004.
- [23] T.L. Saaty, "How to make a decision: The Analytic Hierarchy Process", *European Journal of Operational Research*, vol. 48, pp. 9-26, 1990.
- [24] N. Kuster, F. Schönborn, "Recommended minimal requirements and development guidelines for exposure setups of bio-experiments addressing the health risk concern of wireless communications," *Wiley InterScience, Bioelectromagnetics*, vol. 21, pp. 508-514, 2000.
- [25] *IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz*, Standard C95.1-2005, Institute of Electronics and Electrical Engineers, 2005.
- [26] F. R. Kenneth, "Radiofrequency Exposure From Wireless Lans Utilizing Wi-Fi Technology," *Health Physics*, vol. 92, pp 280-289, 2007.
- [27] *Board Wireless lan medium access control (MAC) and physical layer (PHY) specifications*, IEEE-SA Standards IEEE, 2007.
- [28] A. Majumder, J. Jr. Caffery, "Power line communications", *IEEE, Potentials*, vol.24, pp.4-8, 2004.
- [29] A. Oram (2001). *Peer-to-Peer: Harnessing the Power of Disruptive Technologies*, O'Reilly & Associates, Inc.
- [30] ICT-OMEGA, *Focus Group Sessions Report*, Deliverable 1.4, April 2009(ril). [Online]. Available: <https://www.ict-omega.eu>
- [31] C. M. Ta, B. Wicks, F. Zhang, B. Yang, Y. Mo, K. Wang, Z. Liu, G. Felic, P. Nadagouda, T. Walsh, R. J. Evans, I. Mareels and E. Skafidas, "Issues in the Implementation of a 60GHz Transceiver on CMOS," presented at the 2007 2nd IEEE International Workshop on Radio-Frequency Integration Technology, Singapore.
- [32] TG3cwebpage. [Online]. Available: <http://www.ieee802.org/15/pub/TG3c.html>
- [33] Y. H. Ma, P. L. So and E.Gunawan, "Performance analysis of OFDM systems for broadband power line communications under impulsive noise and multipath," *IEEE Trans. Power Delivery*, vol. 20, pp. 674-681, April 2005.
- [34] K. S. Al-Mawali, F. S. Al-Qahtani and Z. M. Hussain, "Adaptive Power Loading for OFDM-Based Power Line Communications Impaired by Impulsive Noise", presented at the 2010 IEEE ISPLC - International Symposium on Power Line Communications and its Applications.
- [35] M. Huchard, M. Weiss, A. Pizzinat, S. Meyer, P. Guignard, and B. Charbonnier, "Ultra-Broadband Wireless Home Network Based on 60-GHz WPAN Cells Interconnected via RoF," *J. Lightwave Technol.*, vol. 26, pp. 2364-2372, 2008.
- [36] M.S. Gast (2005), *802.11 Wireless Networks: The Definitive Guide*, Second Edition, O'Reilly Media.
- [37] N. Guo, R. C. Qiu, S. S. Mo, and K. Takahashi, "60-GHz Millimeter-Wave Radio: Principle, Technology, and New Results," *Hindawi Publishing Corporation, EURASIP Journal on Wireless Communications and Networking*, Article ID 68253, 8 pages, 2007
- [38] Z. Genc, B. L. Dang, J. Wang, I. Niemegeers, "Home networking at 60 GHz: challenges and research issues", *Ann. Telecommun.*, vol. 63, pp. 501-509, 2008
- [39] J. M. Wilson, "The Next Generation of Wireless LAN Emerges with 802.11n," *Technology Intel Magazine*, 2004
- [40] L. Lily Yang, "60GHz: Opportunity for Gigabit WPAN and WLAN Convergence," *ACM SIGCOMM Computer Communication Review*, vol. 39
- [41] B. Olsen and K. Stordahl, "Models for forecasting cost evolution of components and technologies", *Elektronikk*, vol.100, pp.138-148, 2004.
- [42] Komine, T.; Nakagawa, M., "Integrated system of white LED visible-light communication and power-line communication," *Consumer Electronics, IEEE Transactions on*, vol.49, pp. 71- 79, Feb. 2003.
- [43] T. L. Saaty and L. G. Vargas, "Inconsistency and rank preservation," *Journal of Mathematical Psychology*, vol. 28, pp. 205-214, 1984.